

Patriot Boulevard at Costco/Home Depot Driveway Roundabout


Welcome!

Design Open House
January 25, 2022
6:30 pm



Project Location and Limits

- Patriot Boulevard:
North of Willow Road
at the Costco/Home
Depot Access Road
- All work to be
completed in 2022
within the public right-
of-way and easements

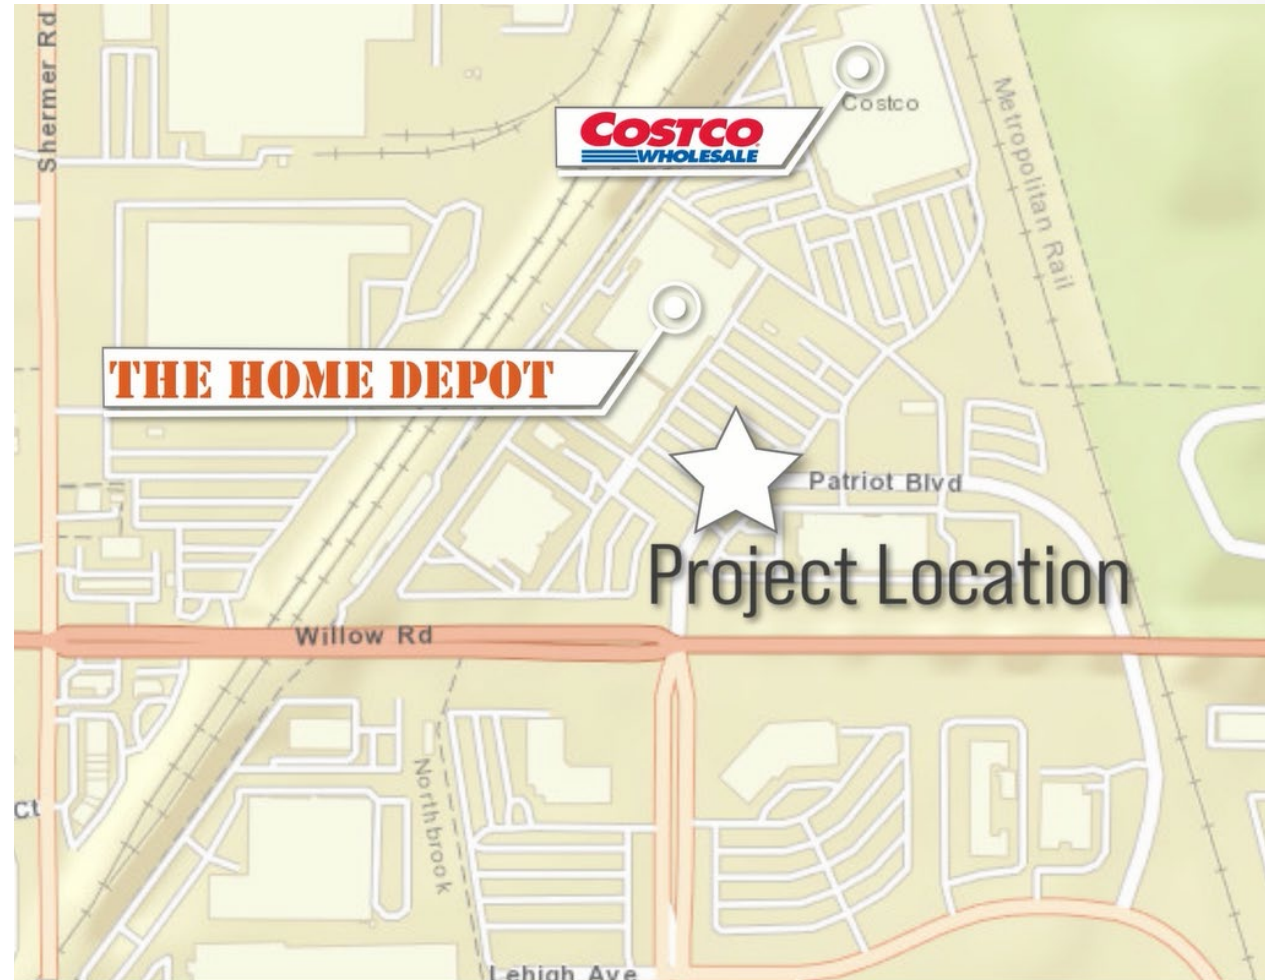

Existing Conditions

- Right turn back-ups exiting Costco/Home Depot Access Road
- Difficulties making a left turn driving towards Lehigh Avenue



Proposed Improvements



Proposed Improvements





Scope of Work

- Install a **roundabout** with decorative islands at the intersection
- Install **free flow southbound right turn lane**
- Improve **storm sewers** to accommodate the roundabout geometry
- Install new and relocated **decorative street lighting**
- Replace **concrete curb and gutter** and **resurface asphalt pavement**
- **Parkway restoration** with sod and **landscaping** enhancements (trees and bushes replaced or relocated)



Roundabout Benefits

- Improved safety
 - Reduces conflict points, both vehicle-vehicle and vehicle-pedestrian
 - Lowers vehicle speeds giving drivers more reaction time

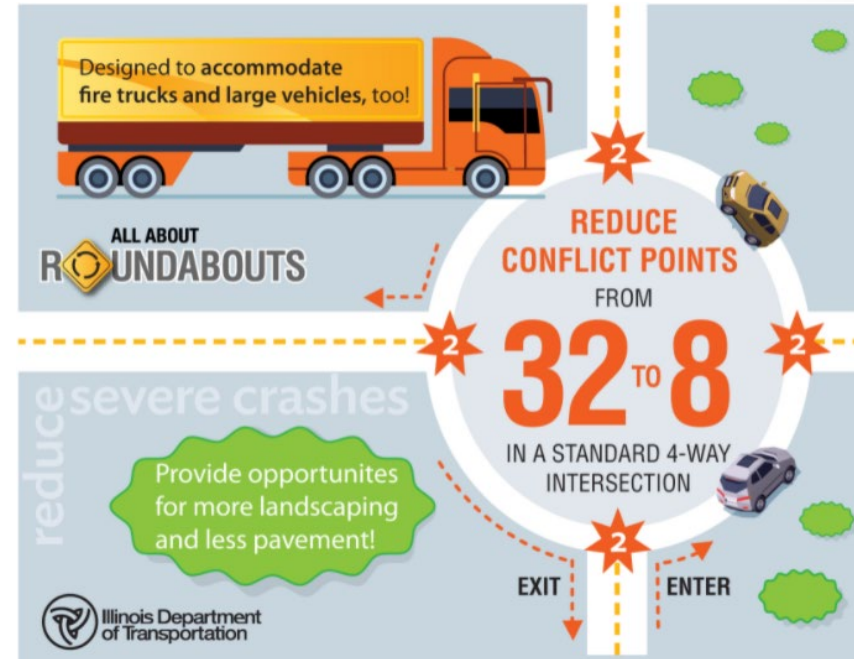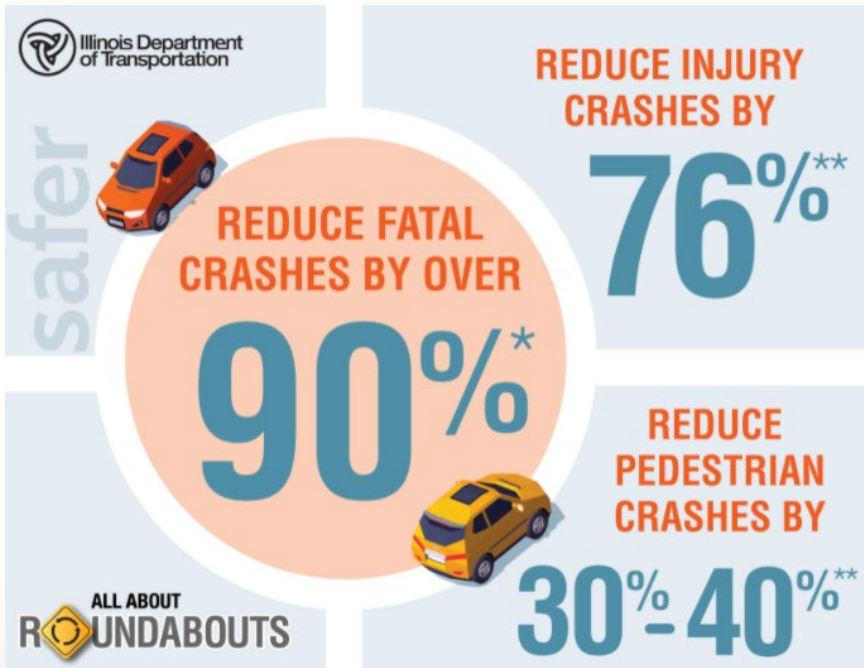

- Efficient Traffic flow
 - Reduces vehicle backups during peak shopping hours
 - Eliminates wait time at stop signs during non-peak hours of traffic
 - Reduces vehicle emissions

Construction Staging

Access to businesses maintained at all times

STAGE 1 (May 31 – June 28)

Traffic to be maintained at all times within existing roadway lanes.

No work to be allowed July 4th weekend


STAGE 2 & 3 (July 6 – August 30)

Temporary lanes and detours will be used to maintain traffic at all times during business work hours.

No work to be allowed Labor Day weekend

After STAGE 3

Final landscaping and restoration

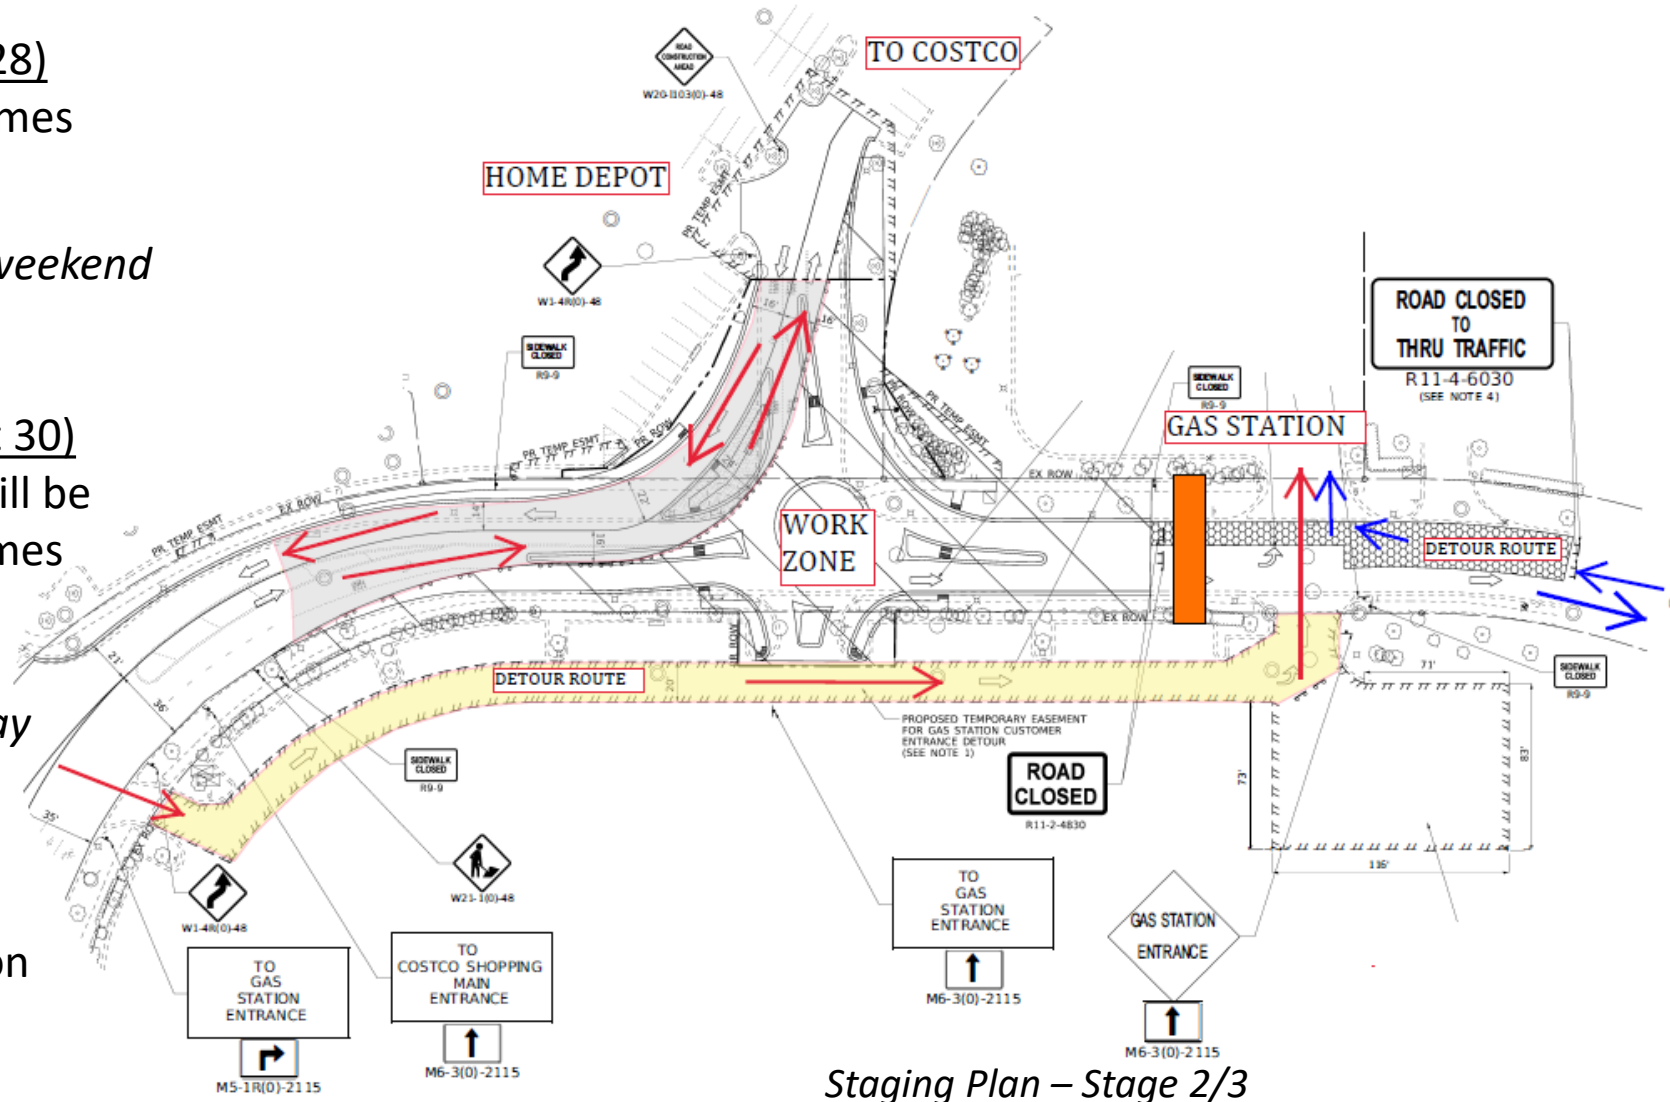

Staging Plan – Stage 2/3

Tentative Schedule and Next Steps

Dates	Steps
January 25, 2022	Open House Design Meeting: <i>Community reviews project information; provides feedback; opportunity to ask questions</i>
Winter 2022	Contract Award
Spring 2022	Open House Pre-construction Meeting: <i>Additional construction schedules and logistics reviewed; information on how to use a roundabout</i>
May 31, 2022	Anticipated Start of Project
September, 2022	Anticipated Construction Completion



The Village of Glenview

Patriot Boulevard Roundabout Improvements

Project Updates

- Project Website Information and updates available at:
<https://www.glenview.il.us/Pages/PatriotCostco.aspx>
- Sign up to receive weekly updates at the link listed above

Find all [project updates here](#).

To sign up for future notifications on this project, fill out the form below. We will email updates on this project when they are available.

First Name	<input type="text"/>
Last Name	<input type="text"/>
Email Address	<input type="text"/>
Confirm Email Address	<input type="text"/>
Street Number	<input type="text"/>
Street Name	<input type="text"/>
Phone number	<input type="text"/>
<input type="submit" value="Submit"/>	

Please click the submit button once. Submission time is based on connection speed. This form will update to confirm your information was submitted.

Contact Us

Written Comments

Engineering Capital Projects
2500 East Lake Avenue
Glenview, IL 60026

Construction Project Manager

Tom Hagerty
Email: thagerty@glenview.il.us
Phone: (847) 904 – 4421

Engineering Manager

Adriana Webb
Email: awebb@glenview.il.us
Phone: (847) 904 – 4414